

The image is a composite advertisement for the CM 3000. The top half shows the exterior of an ATM with a card slot and keypad. The bottom half shows a detailed view of the internal mechanical and electronic components, including a green printed circuit board (PCB) with various chips, a motor, and various sensors and wiring. The text 'PERFECTION INSIDE' is overlaid on the top left, and 'CM 3000' is overlaid in large letters across the middle. A list of features is on the bottom left.


**PERFECTION
INSIDE**

CM 3000

- Integrated into ATMs and self-service systems
- Automatic check and voucher reading and scanning at the point of deposit/payment
- Highly reliable without the need for scheduled preventive maintenance



Robust and reliable, the **Seac Banche CM 3000** was conceived as a full-function document processing module for integration in ATMs and kiosks, allowing customers to carry out transactions without the involvement of a teller by using user-friendly self-service facilities. The unit meets the requirements of advanced self-service applications such as check deposit, check cashing and utility bills payment, and it can carry out thousands of cycles with no need for scheduled maintenance. Special attention has been given in the design so that jams are avoided during feeding and transport of documents. The customer retains control of the document throughout the operation and can abort the transaction and retrieve the document at any time, until the transaction is completed. The CM 3000 provides high return on investment, together with increased customer satisfaction.

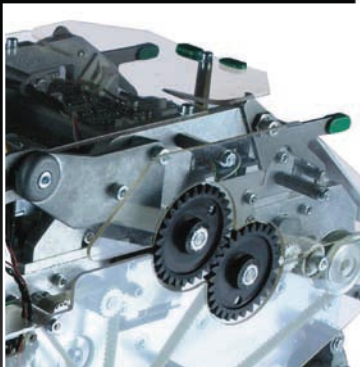

PAPER HANDLING

Outer and inner shutter control
Metal detector & thickness control
Double document control
Transport speed: 433 mm (17")/sec
External sorting flag control.

DOCUMENT SPECIFICATIONS

Width: 120 to 210 mm (4.72" to 8.27")
Height: 70 to 104 mm (2.76" to 4.09")
Weight: 70 to 125 g/sqm (18.7 to 33.3 lbs)

CODELINE READING

MICR: magnetic fonts CMC7 and E13B
OCR: optical fonts OCR-A/OCR-B via add-on software package.

IMAGE CAPTURE

Up to 3 images in one pass: front, rear, front with red dropout
200x200 dpi or 100x100 dpi
256 grey levels

IMAGE FORMAT

Bitmap, Jpeg, Tiff, G4 (B/W)

INTERFACE

USB 2.0

API SOFTWARE TOOLS



Designed for MS Windows XP
Available for MS Windows 2000,
95/98/ME Vista

DIMENSIONS

Length: 470 mm (18.5")
Width: 180 mm (7.1")
Height: 215 mm (8.5")
Weight: 10 Kg (22 lbs)

ADDITIONAL FEATURES

Rear Impact Printer (optional)

Programmable dot-matrix endorser, single-line
Printing set by application.

Front Stamp (optional)

Self-inking cancellation stamp single; double
Maximum dimensions: 20 x 10 mm (0.8" x 0.4")



SEAC BANCHE S.p.A. Headquarters
Via dell'Albereto, 69 - 50041 Calenzano (FI), Italy
Tel: +39 055.8870700 - Fax: +39 055.8873646
Email: info@seacbanche.com - Website: www.seacbanche.com